



# Cisco 7200 Series Router-PBX Interoperability: Siemens Hicom 330E and PA-VXC-2TE1+ Card with E1 ISDN PRI QSIG

This document describes the interoperability and configuration of a Cisco 7200 series router with a Siemens Hicom 330E with E1 ISDN PRI QSIG signaling. It includes the following sections:

- System Components
- Configuration Tasks
- Caveats

## System Components

PBX Model	Siemens Hicom 300 E
PBX Release	Version 3.1
Telephony Signaling	E1 QSIG
Voice Gateway	Cisco 7200 series router
Gateway Release	12.2(1)
VoX Protocol	H.323

## Configuration Tasks

See the following sections for configuration tasks for this feature:

- Set Up
- Siemens Hicom 330E PBX Configuration
- Call Manager Configuration

## Set Up

This section includes the following information:

- Connectivity Diagrams
- Set Up Notes

### Connectivity Diagrams

**Figure 1: Test Configuration**

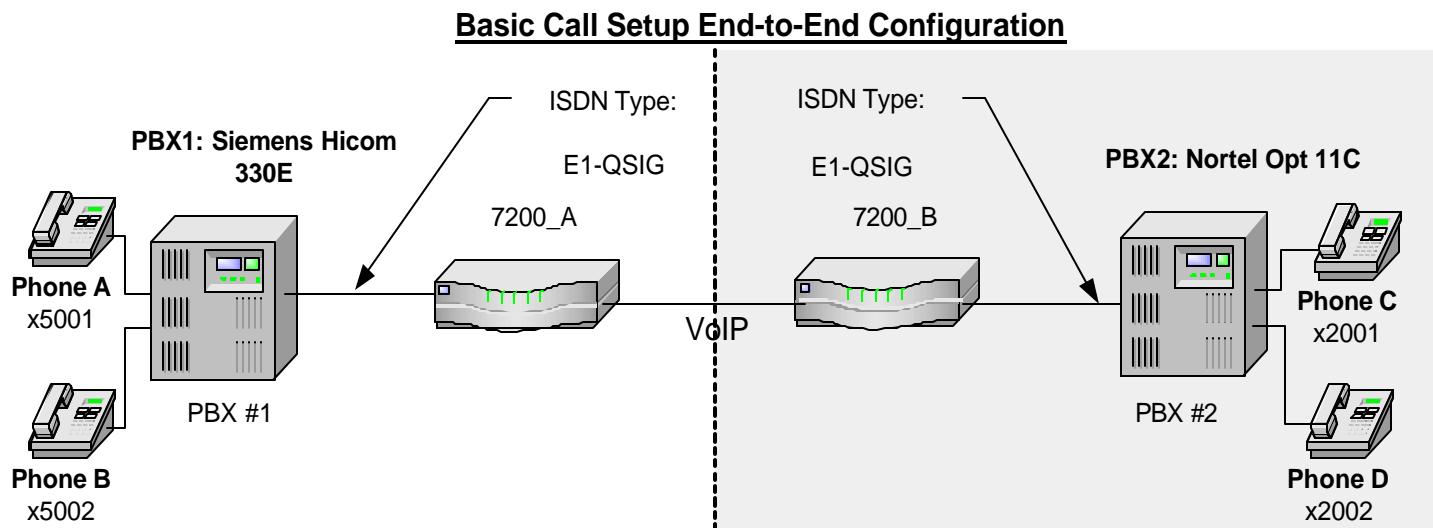


Figure 1 represents the configuration used for testing: a Siemens Hicom 330E PBX is connected through an E1 ISDN PRI QSIG link to a Cisco 7200 series router.

### Set Up Notes

The Cisco 7200 router with ISDN switch type setting of **primary-qsig** supports both protocol sides by using the **isdn protocol-emulate network/user** command.

Configuring the Siemens operation to be Master (or Network) side sets the Layers 2 & 3 protocol side setting to master as well. Therefore, the Cisco 7200\_A router should be set to Slave protocol side by issuing the command: “**isdn protocol-emulate user**”.

Similarly, if the Siemens operation is set for Slave (or user) side, layers 2 and 3 on the protocol side are set for slave side. The Cisco 7200 series router is set to Master protocol side by issuing the command: **isdn protocol-emulate network**.

The layer 1 configuration in the Siemens Hicom 330E PBX is assigned to the device type S2CONN through parameter “LWPAR” (Loadware Parameters). For Master side operation, the Siemens Hicom 330E is configured so that the LWPAR field under the <cha-tdcsu> command is:

LWPAR = 4

The applicable fields under LWPAR = 4 <cha-lwpars> are as follows:

MASTER = Y

SMD = Y

For slave side operation:

LWPAR = 1

The applicable fields under LWPAR = 1 <cha-lwpars> are as follows:

MASTER = N

SMD = N

## Siemens Hicom 330E PBX Configuration

Use the following information to configure the Siemens Hicom 330E PBX:

- Siemens Hicom 330E PBX Version Information
- Siemens Hicom 330E PBX Sample Configuration

### Siemens Hicom 330E PBX Version Information

- Hardware: 330E.

### Siemens Hicom 330E PBX Sample Configuration

Use the following examples to configure the Siemens Hicom 330E PBX:

- Trunk Configuration
- Route Configuration
- Board Configuration
- Least Cost Routing Configuration
- Class Of Service
- System Information

### Trunk Configuration

#### **For Master side configuration:**

```
<dis-tdcsu
```

```
PEN1 = 1-1-73-0;
DIS-TDCSU:1-1-73-0;
H500: AMO TDCSU STARTED
```

DIGITAL TRUNK (FORMAT=L)			
DEV = S2CONN		PEN = 1-01-073-0	
COTNO = 4	COPNO = 4	DPLN = 0	
ITR = 0	COS = 32	LCOSV = 31	
LCOSD = 31	CCT = qsig	DESTNO = 99	
PROTVAR = ECMAL	SEGMENT = 1	TCHARG = N	
SUPPRESS = 0	DGTPR =	CHIMAP = N	
ISDNCC =	ISDNAC =	ISDNLC =	
ISDNIP =	ISDNNP =		
PNPL2C =	PNPL1C =	PNPLC =	
PNPL2P =	PNPL1P =	PNPAC =	
TRACOUNT = 31	SATCOUNT = MANY	NNO = 1 -1 -999	
ALARMNO = 2	FIDX = 1	CARRIER = 1	

## Cisco 7200 Series Router-PBX Interoperability: Siemens Hicom 330E

```
+-----+
| ZONE      = EMPTY          COTX     = 4           FWDX     = 10
| DOMTYPE   =                   DOMAINNO =             TPROFNO =
| INIGHT    =
| CCHDL    =
|               UUSCCX   = 16          UUSCCY   = 8
+-----+
| TGRP      = 37            SRCHMODE = CIR          BCNEG    = N
| BCGR      = 1              INS      = Y           LWPAR    = 4
| LWPP      = 0            LWLT     = 0           LWPS     = 0
| LWR1      = 0            LWR2     = 0
| BCHAN     1 && 30
+-----+
```

AMOUNT OF B-CHANNELS IN THIS DISPLAY-OUTPUT: 30

AMO-TDCSU-82 DIGITAL TRUNKS

DISPLAY COMPLETED;

### For Slave side configuration:

<dis-tdcsu

```
PEN1 = 1-1-73-0;
DIS-TDCSU:1-1-73-0;
H500: AMO TDCSU STARTED
```

```
+-----+-----+-----+-----+
|          DIGITAL TRUNK (FORMAT=L)          |          PEN = 1-01-073-0
|          DEV = S2CONN                      |          -----
+-----+-----+-----+-----+
| COTNO      = 4             COPNO     = 4           DPLN      = 0
| ITR        = 0              COS       = 32          LCOSV    = 31
| LCOSD     = 31            CCT       = qsig         DESTNO   = 99
| PROTVAR   = ECMA1          SEGMENT   = 1           TCHARG   = N
| SUPPRESS   = 0              DGTPR     =             CHIMAP   = N
| ISDNCC    =
| ISDNIP    =
| PNPL2C    =
| PNPL2P    =
| TRACOUNT  = 31            SATCOUNT = MANY        NNO      = 1 -1 -999
| ALARMNO   = 2              FIDX     = 1           CARRIER =
| ZONE      = EMPTY          COTX     = 4           FWDX     = 10
| DOMTYPE   =
| INIGHT    =
| CCHDL    =
|               UUSCCX   = 16          UUSCCY   = 8
+-----+-----+-----+-----+
| TGRP      = 37            SRCHMODE = CIR          BCNEG    = N
| BCGR      = 1              INS      = Y           LWPAR    = 1
| LWPP      = 0            LWLT     = 0           LWPS     = 0
| LWR1      = 0            LWR2     = 0
| BCHAN     1 && 30
+-----+
```

AMOUNT OF B-CHANNELS IN THIS DISPLAY-OUTPUT: 30

AMO-TDCSU-82 DIGITAL TRUNKS

DISPLAY COMPLETED;

<dis-lwpar;

```
DIS-LWPAR;
H500: AMO LWPAR STARTED
```

Cisco 7200 Series Router-PBX Interoperability: Siemens Hicom 330E

```
+--+
| LOADWARE PARAMETERS      CIRCUIT TYPE: DIUS2   SOURCE:DB    BLOCK:  1 |
+--+
| LNTYPE      = COPPER      VERSION   = S2          QUAL     = ON
| MASTER       = N           DCHAN1   = 16         DCHAN2   = 0
| PATTERN     = D5H          QUAL1    = 10 SEC.    QUAL2    = 10 MIN.
| SMD          = N           PERMACT   = Y          FCBAB    = DFH
| CDG          = N           FIXEDTEI = 0          CNTRNR   = 255
| TEIVERIF    = N           CRC4REP  = N
| DEV          = INDEP
| INFO         = 1:COPPER-DERIVE CLOCK FROM LINE(I421)
+--+
```

```
+--+
| LOADWARE PARAMETERS      CIRCUIT TYPE: DIUS2   SOURCE:DB    BLOCK:  4 |
+--+
| LNTYPE      = COPPER      VERSION   = S2          QUAL     = ON
| MASTER       = Y           DCHAN1   = 16         DCHAN2   = 0
| PATTERN     = D5H          QUAL1    = 10 SEC.    QUAL2    = 10 MIN.
| SMD          = Y           PERMACT   = Y          FCBAB    = DFH
| CDG          = Y           FIXEDTEI = 0          CNTRNR   = 255
| TEIVERIF    = N           CRC4REP  = N
| DEV          = INDEP
| INFO         = 4:COPPER-MASTER CLOCK(DPNSS A-END)
+--+
```

<dis-buend

```
TGRP = 37
FORMAT = 1;
DIS-BUEND:37,L;
H500: AMO BUEND STARTED
```

```
+----- FORMAT = L -----
| TGRP NUMBER : 37   TGRP NAME   : qsig           MAXIMUM NO. : 30
| SUBGROUP NO.: 10   DEVICE TYPE : S2CONN        TRACENO    : 0
| RESERVED     : N    SEARCH MODE : CIRCULAR      ACD THRESHOLD : *
| NUMBER OF ASSOCIATED ROUTES : 1                 PRIORITY   : 1
| THE FOLLOWING TRUNKS (LTG-LTU-SLOT-CCT) HAVE BEEN ALLOCATED:
+-----+
| 1- 1- 73-0  B-CHL: 1 | 1- 1- 73-0  B-CHL: 2 | 1- 1- 73-0  B-CHL: 3
| 1- 1- 73-0  B-CHL: 4 | 1- 1- 73-0  B-CHL: 5 | 1- 1- 73-0  B-CHL: 6
| 1- 1- 73-0  B-CHL: 7 | 1- 1- 73-0  B-CHL: 8 | 1- 1- 73-0  B-CHL: 9
| 1- 1- 73-0  B-CHL: 10 | 1- 1- 73-0  B-CHL: 11 | 1- 1- 73-0  B-CHL: 12
| 1- 1- 73-0  B-CHL: 13 | 1- 1- 73-0  B-CHL: 14 | 1- 1- 73-0  B-CHL: 15
| 1- 1- 73-0  B-CHL: 16 | 1- 1- 73-0  B-CHL: 17 | 1- 1- 73-0  B-CHL: 18
| 1- 1- 73-0  B-CHL: 19 | 1- 1- 73-0  B-CHL: 20 | 1- 1- 73-0  B-CHL: 21
| 1- 1- 73-0  B-CHL: 22 | 1- 1- 73-0  B-CHL: 23 | 1- 1- 73-0  B-CHL: 24
| 1- 1- 73-0  B-CHL: 25 | 1- 1- 73-0  B-CHL: 26 | 1- 1- 73-0  B-CHL: 27
| 1- 1- 73-0  B-CHL: 28 | 1- 1- 73-0  B-CHL: 29 | 1- 1- 73-0  B-CHL: 30
+-----+
```

AMO-BUEND-82 TRUNK GROUP

DISPLAY COMPLETED;

<dis-refta

```
TYPE = circuit
PEN = 1-1-73-0;
DIS-REFTA:CIRCUIT,1-1-73-0;
H500: AMO REFTA STARTED
```

```
+-----+
|             R E F E R E N C E   C L O C K   C I R C U I T S   |
+-----+-----+-----+-----+-----+-----+-----+
| PEN        | MODULE    | DEVICE    | PRI     | ERROR    | BLOCK    | SUPP.    | READY   |
+-----+-----+-----+-----+-----+-----+-----+
```

								BUT ASYN.
1-	1-	73-	0	DIU-N2	S2CONN	11	11023	N
								X
								N

AMO-REFTA-82 REFERENCE CLOCK TABLE

DISPLAY COMPLETED;

## Route Configuration

```
<dis-richt

MODE = all
DIS-RICHT:ALL;
H500: AMO RICHT STARTED

+-
+-----+
| LRTE = 37      NAME = TEST                      SRVC = ALL
| DNNO = 1 -1 -999
| ROUTOPT = NO    REROUT = YES     PLB = NO      FWDBL = NO
| MFV: CNV=FIX    DSP=WITHOUT TEXT=                PULS=PP300
| ROUTENO = 4     BUGS = LIN                         MAINGROUP = 4
| INFO =
+-----+
| TGRP = 37      LDAT      PRI                  SUBGROUP = 10
| TGRP = 38      LDAT      QSIG                 SUBGROUP = 9
+-----+
| LRTE = 39      NAME = BRISLAVE                  SRVC = ALL
| DNNO = 1 -1 -1
| ROUTOPT = NO    REROUT = YES     PLB = NO      FWDBL = NO
| MFV: CNV=WITHOUT DSP=WITHOUT TEXT=              PULS=
| ROUTENO = 7     BUGS = LIN                         MAINGROUP = 7
| INFO =
+-----+
| TGRP = 39      BRI                   SUBGROUP = 8
+-----+
| LRTE = 40      NAME = BRI TRUNK                  SRVC = ALL
| DNNO = 1 -1 -999 DESTNO = 99
| ROUTOPT = NO    REROUT = YES     PLB = NO      FWDBL = NO
| MFV: CNV=FIX    DSP=WITHOUT TEXT=                PULS=PP300
| ROUTENO = 3     BUGS = LIN                         MAINGROUP = 3
| INFO =
+-----+
| TGRP = 40      LDAT      BRI MASTER             SUBGROUP = 13
+-----+
```

AMO-RICHT-82 TRUNK ROUTING

DISPLAY COMPLETED;

## Board Configuration

```
<dis-bcsu

TYPE = tbl
LTG = 1
LTU = 1
SLOT = 73
DIS-BCSU:TBL,1,1,73;

H500: AMO BCSU STARTED
```

ADDRESS : LTG 1 LTU 1

PEN	MODULE	TYPE	FCT ID	HWY BDL	INSERTED MODULE	STATE	HW-INFO	MODULE STATUS
73	Q2196-X	DIU-N2	1	A	Q2196-X	1	-04 -	READY

AMO-SBCSU -82 BOARD CONFIGURATION, SWITCHING UNIT

DISPLAY COMPLETED;

## Station Phone Configuration

<dis-sbcsu

STNO = 5000

TYPE = all

DIS-SBCSU:5000,TERMDATA;

H500: AMO SBCSU STARTED

----- USER DATA -----									
STNO	=5000	OPT	=OPTI	COS1	=7	DPLN	=0	SPDI	=Y
MAINO	=5000	CONN	=DIR	COS2	=7	ITR	=0	SPDC1	=0
PEN	= 1 - 1- 79-	1		LCOSV1	=31	COSX	=0	SPDC2	=1
INS	=Y	STD	=3	LCOSV2	=31	SERVID	=0	CBKBMAX	=5
		SECR	=N	LCOSD1	=31	DSSTNA	=N	RCBKB	=N
SSTNO	=N	DIGNODIS	=N	LCOSD2	=31	DSSTNB	=Y	RCBKNA	=N
TRACE	=N	HFREE	=	ASYNCT	=500	PERMACT		CBKNAMB	=Y
ALARMNO	=0	HMUSIC	=0	API	=N	TEXTSEL	=ENGLISH		
EXTBUS	=	REP	=0	OPTICOM	=N	OPTISPA	:0	DLAUT	=
CALLOG	=NONE	IDCR	=N	OPTICA	=0	OPTISOA	:0	DLMAN	=
		HEADSET	=N	OPTIDA	=0	OPTIABA	:0	PRIOR	=
		HSKEY	=NORMAL	ATMADDR				VPI	=
		DFSVCANA		TFAGRP		PATTERN		VCI	=
DVCFIG	=OPTISET	TSI	=1	SOPTIDX		SPROT			
				DPROT					
				FOPTIDX		FPROT			
				TOPTIDX		TPROT			
				VOPTIDX		VPROT			
----- ACTIVATION IDENTIFIERS FOR FEATURES -----									
FWDS	:N	FWDT	:N	FWDV	:N	FWDF	:N	FWDD	:N
HTOS	:N	HTOT	:N	HTOV	:N	HTOF	:N	HTOD	:N
DND	:N	VCP	:Y	CWT	:N			TCLOGIN	:N
----- FEATURES AND GROUP MEMBERSHIPS -----									
ESSTN	:								
PUGR	:	HUNTING GROUP	:	N					
KEYSYS	:N	NIGHT OPTION	:	N	ASSOCIATED	STN			: N
----- SUBSCRIBER ATTRIBUTES (AMO SDAT) -----									
NONE									
----- STATION AND S0-BUS CONFIGURATION OF SWITCHING UNIT -----									
AMO-SBCSU-95									
STATION AND S0-BUS CONFIGURATION OF SWITCHING UNIT									
DISPLAY COMPLETED;									

## Least Cost Routing Configuration

```

<dis-ldat
TYPE = ?
TYPE : DISPLAY TYPE CHARACTERISTIC : OPTIONAL
POSSIBLE VALUES : LCR ONLY LROUTES FOR LCR
LROUTES WITH CLOSED NUMBERING BY LCR ALL NWLCR ONLY
LROUTE = ;
DIS-LDAT:LCR,; H500: AMO LDAT STARTED
+-----+
| LROUTE = 1 LDPLN NAME = CENTRAL OFFICE SERVICE = ALL |
| TYPE = LCR DNNO OF ROUTE = 1 -1 -999 |
| SERVICE INFO = |
+-----+
| LRTEL | LVAL | TGRP | ODR | LAUTH | SCHEDULE | CARRIER | BAND |
| ABCDEFGH | ZONE | WDTW | LATTR |
+-----+
| 1 | 1 | 30 | 1 | 1 | ***** | 1 | EMPTY | 1 | NONE |
+-----+
| LROUTE = 31 LDPLN NAME = E&M SERVICE = VCE |
| TYPE = LCR DNNO OF ROUTE = 1 -1 -999 |
| SERVICE INFO = |
+-----+
| LRTEL | LVAL | TGRP | ODR | LAUTH | SCHEDULE | CARRIER | BAND |
| ABCDEFGH | ZONE | WDTW | LATTR |
+-----+
| 1 | 1 | 31 | 1 | 1 | ***** | 1 | EMPTY | 1 | NONE |
+-----+
| LROUTE = 37 LDPLN NAME = PRI TEST SERVICE = ALL |
| TYPE = LCR DNNO OF ROUTE = 1 -1 -999 |
| SERVICE INFO = |
+-----+
| LRTEL | LVAL | TGRP | ODR | LAUTH | SCHEDULE | CARRIER | BAND |
| ABCDEFGH | ZONE | WDTW | LATTR |
+-----+
| 1 | 1 | 37 | 1 | 1 | ***** | 1 | EMPTY | 1 | NONE |
| 2 | 1 | 38 | 1 | 1 | ***** | 1 | EMPTY | 1 | NONE |
+-----+
| LROUTE = 40 LDPLN NAME = BRI TRUNK SERVICE = ALL |
| TYPE = LCR DNNO OF ROUTE = 1 -1 -999 |
| SERVICE INFO = |
+-----+
| LRTEL | LVAL | TGRP | ODR | LAUTH | SCHEDULE | CARRIER | BAND |
| ABCDEFGH | ZONE | WDTW | LATTR |
+-----+
| 1 | 1 | 40 | 1 | 1 | ***** | 1 | EMPTY | 1 | NONE |
+-----+
AMO-LDAT -187 LCR-DIRECTIONS
DISPLAY COMPLETED;

```

## Class Of Service

```

<dis-cot

COTNO = 4;

DIS-COT:4;

H500: AMO COT STARTED

COT: 4 INFO: 4:Q931 EXTERNAL
DEVICE: INDEP SOURCE: DB
PARAMETER:

```

Cisco 7200 Series Router-PBX Interoperability: Siemens Hicom 330E

PRIORITY FOR AC WILL BE DETERMINED FROM MESSAGE	PRI
RECALL IF USER HANGS UP IN CONSULTATION CALL	RCL
TRUNK CALL TRANSFER	XFER
TRUNK SIGNALING ANSWER	ANS
CHANGEOVER FROM HOLD TO RING TONE	CHRT
KNOCKING OVERRIDE POSSIBLE	KNOR
CALL EXTEND FOR BUSY, RING OR CALL STATE	CEBC
NETWORKWIDE AUTOMATIC CALLBACK ON BUSY	CBBN
NETWORKWIDE AUTOMATIC CALLBACK ON FREE	CBFN
DON'T RELEASE CALL TO BUSY HUNT GROUP	BSHT
SEND NO NODE NUMBER TO PARTNER	LWNC
INCOMING CIRCUIT FROM SYSTEM WITHOUT LCR	NLCR
TSC-SIGNALING FOR NETWORKWIDE FEATURES (MANDATORY)	TSCS
INCOMING CDR BY ZONE OR FROM LINE	ICZL
INCOMING CIRCUIT FROM SYSTEM WITHOUT LCR (DATA)	NLRD
AOC PER CALL (AUTOMATICAL OR ON REQUEST), MAND. CORNET-NQ	AOCC
CONTROLLED TRUNK AND LINE SELECTION	CTLS
NO TONE	NTON

AMO-COT -95 CLASS OF TRUNK FOR CALL PROCESSING

DISPLAY COMPLETED;

<dis-cop

COPNO = 4;

DIS-COP:4;

H500: AMO COP STARTED

COP: 4	INFO: 4:Q931
DEVICE: INDEP	SOURCE: DB
PARAMETER:	
SPECIAL MODE	
REGISTRATION OF LAYER 3 ADVISORIES	

SFRM  
L3AR

AMO-COP -95 CLASS OF PARAMETER FOR DEVICE HANDLER

DISPLAY COMPLETED;

<dis-coisu

TYPE = cos
COS = 32;
DIS-COISSU:COS,32;
H500: AMO COSSU STARTED

COS	VOICE	FAX	TTX	VTX	DTE
32	>32:TRUNKS TA TNOTCR	NOCO NOTIE	NOCO NOTIE	NOCO NOTIE	TA TNOTCR BASIC MSN CDRINT MULTRA

AMO-COSSU-82 CLASSES OF SERVICE, SWITCHING UNIT

DISPLAY COMPLETED;

```
<dis-cossu

TYPE = lcov
LCOS = 31;
DIS-COSSU:LCOS,31;
H500: AMO COSSU STARTED

THE LCR CLASSMARKS ARE CONTAINED IN THE FOLLOWING LCOS:
```

LCOS	LCOSV	LCOSD
	12345678901234567890123456789012	12345678901234567890123456789012
31	>SERVICE INFORMATION	XX

```
AMO-COSSU-82          CLASSES OF SERVICE, SWITCHING UNIT
DISPLAY COMPLETED
```

## System Information

---

```
<dis-dbc
VERBOSE = ?
VERBOSE      : LIST OF ACTIVE DB SUBSYSTEMS CHARACTERISTIC : OPTIONAL
POSSIBLE VALUES : Y           YES                  N           NO
DIS-DBC:Y; H500: AMO DBC     STARTED

+-----+
| SYSTEM CLASSIFICATION   : SYSTEM 80          (H80      ) |
| HARDWARE ASSEMBLY       : EXTENDED COMPACT CXE (CXE      ) |
| DEVELOPMENT LINE         : EUROPE DEVELOPMENT (H300) |
| OPERATING MODE           : SIMPLEX           |
| RESTART TYPE              : SYM                |
| HW-ARCHITECTURE          : 330E               |
| HW-ARCHITECTURE TYPE     : 4                  |
|
| 'NO OF' HW VALUES        |
| LTG'S       : 1    LTU'S       : 4    LOG.LINES : 8000  MTS BD /GSN: 1 |
| SIUP'S/LTU: 4    TMD24'S PER LTU: 4    PHYS.PORTS: 2688 HWY /MTS BD: 64 |
| HDLC /DCL : 5    PBC /DCL : 1    PBC'S      : 17 |
| LOG. SIU LINES            : 26                |
| LOG. CONF LINES           : 35                |
| LOG. DCL LINES             : 36                |
| DB DIMENSIONING-NAME     : 350EMSTD          CONF-TABLE VERSION: 1 |
| DB SUSY'S:                 |
| SWITCH NUMBER : L31900Q2999A00001 |
| DB                         |
| SYSTEM_ID                 : PKP091000 |
+-----+
AMO-DBC -210          DATABASE CONFIGURATION
DISPLAY COMPLETED;
```

## Cisco 7200 Series Router Configuration

The following is the configuration of the Cisco 7200 series router connected to the Siemens Hicom 330E PBX ISDN PRI interface:

- Cisco 7200 Series Router Version Information
- Cisco 7200 Series Router Sample Configuration

### Cisco 7200 Series Router Version Information

- Cisco IOS™ (C7200-JS-M), Version 12.2(1).
- Cisco 7206VXR (NPE300) processor (revision D) with 122880K/40960K bytes of memory.

```
Router# show version
Cisco Internetwork Operating System Software
IOS (tm) 7200 Software (C7200-JS-M), Version 12.2(1), RELEASE SOFTWARE (fc2)
Copyright (c) 1986-2001 by cisco Systems, Inc.
Compiled Thu 26-Apr-01 22:10 by cmong
Image text-base: 0x60008960, data-base: 0x616B0000

ROM: System Bootstrap, Version 12.0(19990210:195103) [12.0XE 105], DEVELOPMENT SOFTWARE

VXR1 uptime is 30 minutes
System returned to ROM by power-on
System image file is "slot0:c7200-js-mz.122-1"

cisco 7206VXR (NPE300) processor (revision D) with 122880K/40960K bytes of memory.
Processor board ID 16075926
R7000 CPU at 262Mhz, Implementation 39, Rev 1.0, 256KB L2, 2048KB L3 Cache
6 slot VXR midplane, Version 2.0

Last reset from power-on
Bridging software.
X.25 software, Version 3.0.0.
SuperLAT software (copyright 1990 by Meridian Technology Corp).
TN3270 Emulation software.
Primary Rate ISDN software, Version 1.1.
Channelized E1, Version 1.0.
4 Ethernet/IEEE 802.3 interface(s)
1 FastEthernet/IEEE 802.3 interface(s)
31 Serial network interface(s)
2 Channelized E1/PRI port(s)
1 Voice resource(s)
125K bytes of non-volatile configuration memory.

4096K bytes of Flash internal SIMM (Sector size 256K).
Configuration register is 0x0
```

### Cisco 7200 Series Router Sample Configuration

The following is a sample configuration of the Cisco 7200 series router directly connected to Siemens Hicom 330E PBX ISDN PRI interface.

```
Router# show run
Building configuration...

Current configuration : 1413 bytes
!
version 12.2
no service single-slot-reload-enable
service timestamps debug uptime
service timestamps log uptime
```

```
no service password-encryption
!
hostname VXR1
!
card type e1 1
logging rate-limit console 10 except errors
!
frame-clock-select 1 E1 1/0
dspint DSPfarm1/0
!
ip subnet-zero
!
!
no ip finger
!
no ip dhcp-client network-discovery
isdn switch-type primary-qsig
call rsvp-sync
!
!
!
!
!
!
controller E1 1/0
pri-group timeslots 1-31
!
controller no logging event link-status
isdn switch-type primary-qsig
isdn protocol-emulate network
isdn incoming-voice voice
no isdn T309-enable
isdn T310 60000
no cdp enable
!
interface Ethernet6/0
ip address dhcp
duplex half
!
interface Ethernet6/1
no ip address
shutdown
duplex half
!
interface Ethernet6/2
no ip address
shutdown
duplex half
!
interface Ethernet6/3
no ip address
shutdown
duplex half
!
ip kerberos source-interface any
ip classless
no ip http server
!
!
!
voice-port 1/0:15
!
dial-peer voice 1 pots
destination-pattern 5...
direct-inward-dial
port 1/0:15
prefix 5
!
dial-peer voice 2 voip
destination-pattern 2...
session target ipv4:18.0.0.2
```

```
!
!
gatekeeper
  shutdown
!
!
line con 0
  transport input none
line aux 0
line vty 0 4
  login
line vty 5 15
  login
!
end
```

---

### Cisco 7200 Series Router Sample Diagnostics

The following is a sample diagnostics of the Cisco 7200 series router connected to Siemens Hicom 330E PBX ISDN PRI interface.

```
Router# show diag
Slot 0:
  Fast-ethernet on C7200 I/O card with MII or RJ45 Port adapter, 1 port
  Port adapter is analyzed
  Port adapter insertion time 00:30:32 ago
  EEPROM contents at hardware discovery:
    Hardware revision 2.1          Board revision B0
    Serial number 15788289      Part number 73-4092-03
    Test history 0x0            RMA number 00-00-00
    EEPROM format version 1
    EEPROM contents (hex):
      0x20: 01 83 02 01 00 F0 E9 01 49 0F FC 03 00 00 00 00
      0x30: 58 00 00 00 00 04 16 00 00 00 FF FF FF FF FF FF

Slot 1:
  VXC-2T1E1+ Port adapter, 2 ports
  Port adapter is analyzed
  Port adapter insertion time 00:30:31 ago
  EEPROM contents at hardware discovery:
    Hardware Revision : 0.2
    PCB Serial Number : MIC05012P67
    Part Number : 73-5340-03
    Board Revision : A0
    RMA Test History : 00
    RMA Number : 0-0-0-0
    RMA History : 00
    Deviation Number : 0-0
    Product Number : PA-VXC-2T1E1+
    Top Assy. Part Number : 8034-08469-01
    EEPROM format version 4
    EEPROM contents (hex):
      0x00: 04 FF 40 02 11 41 00 02 C1 8B 4D 49 43 30 35 30
      0x10: 31 32 50 36 37 82 49 14 DC 03 42 41 30 03 00 81
      0x20: 00 00 00 00 04 00 80 00 00 00 00 CB 94 50 41 2D
      0x30: 56 58 43 2D 32 54 31 45 31 2B 20 20 20 20 20 20
      0x40: 20 C0 46 1F 62 00 21 15 01 FF FF FF FF FF FF FF FF
      0x50: FF FF
      0x60: FF FF
      0x70: FF FF

Slot 6:
  Ethernet Port adapter, 4 ports
  Port adapter is analyzed
  Port adapter insertion time 00:30:32 ago
  EEPROM contents at hardware discovery:
    Hardware revision 1.14          Board revision A0
    Serial number 11530208      Part number 73-1556-08
```

```
Test history      0x0          RMA number      00-00-00
EEPROM format version 1
EEPROM contents (hex):
 0x20: 01 02 01 0E 00 AF EF E0 49 06 14 08 00 00 00 00
 0x30: 50 00 00 00 99 01 16 00 FF FF FF FF FF FF FF FF
```

```
Router# clear counters
Clear "show interface" counters on all interfaces [confirm]
Router#
00:30:48: %CLEAR-5-COUNTERS: Clear counter on all interfaces by console
Router#
Router# show controllers e1 1/0
E1 1/0 is up.
Applique type is Channelized E1 - balanced
No alarms detected.
alarm-trigger is not set
Framing is CRC4, Line Code is HDB3, Clock Source is Line.
International Bit: 1, National Bits: 11111
Active xconns: 0
Data in current interval (17 seconds elapsed):
 0 Line Code Violations, 0 Path Code Violations
 0 Slip Secs, 0 Fr Loss Secs, 0 Line Err Secs, 0 Degraded Mins
 0 Errorred Secs, 0 Bursty Err Secs, 0 Severely Err Secs, 0 Unavail Secs
Router#
```

## Caveats

- To assure that Calling Name delivery and presentation is supported on both sides, the Siemens is configured for ECMA1 type of supplementary services.